

Radio interference suppression filter, three-phase, for IT Network
HLD 810



General Data

Rated voltage 3 x 520 Vac
Voltage range 0 - 3 x 520 Vac
Rated current 3 x 8 - 3 x 250 A
Ambient temperature max. 50 °C
Degree of protection IP 20
Leakage current 0 mA


Advantages

For enhanced requirements
Single-stage filter concept
Efficient filter effect against line-bound interference emissions
Increase in the interference immunity of the connected consumer

Applications

Radio interference suppression filter for line-side interference suppression of single devices, frequency converters or as group interference suppression.

Sample application

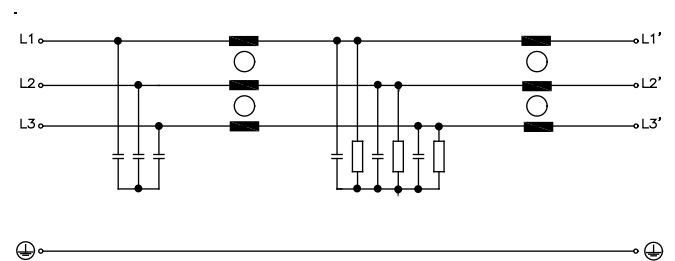

Standards

Radio interference suppression filter complying with
DIN EN 60939-2, UL 1283, CSA C22.2 No.8

Approvals



UL 1283 5th edition, CSA 22.2 No 8

1.1

1.2

1.3

2.1

2.2

3.1

3.2

3.3

4.0

5.1

5.2

3 Reactors / EMI filters

Three-phase radio interference suppression filters



Radio interference suppression filter, three-phase, for IT Network

HLD 810



Typ		HLD 810-500/8	HLD 810-500/12	HLD 810-500/16	HLD 810-500/30	HLD 810-500/42	HLD 810-500/55
Electrical data	Operating data						
	Voltage range	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac
	Rated voltage	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac
	Rated current	3 x 8 A	3 x 12 A	3 x 16 A	3 x 30 A	3 x 42 A	3 x 55 A
	Rated frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
	Power loss	6.0 W	9.0 W	12.0 W	15.0 W	22.0 W	30.0 W
	Oversrating Capacity	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly
	Leakage current (50 Hz)	0 mA	0 mA	0 mA	0 mA	0 mA	0 mA
	Approvals						
	Approvals	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8
Environment	Climatic category						
	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]
Ambient temperature max.	50 °C	50 °C	50 °C	50 °C	50 °C	50 °C	
Safety and protection							
SCCR*	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA	
Type	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	
Protection index	IP 20	IP 20	IP 20	IP 20	IP 20	IP 20	
Safety class (prepared)	I	I	I	I	I	I	
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	
Notes							
*	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	
Order numbers							
Order Number	HLD 810-500/8	HLD 810-500/12	HLD 810-500/16	HLD 810-500/30	HLD 810-500/42	HLD 810-500/55	



Radio interference suppression filter, three-phase, for IT Network **HLD 810**



Typ	HLD 810-500/75	HLD 810-500/100	HLD 810-500/130	HLD 810-500/180	HLD 810-500/250
Electrical data					
Operating data					
Voltage range	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac	0 - 520 Vac
Rated voltage	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac	3 x 520 Vac
Rated current	3 x 75 A	3 x 100 A	3 x 130 A	3 x 180 A	3 x 250 A
Rated frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Power loss	35.0 W	60.0 W	90.0 W	150.0 W	180.0 W
Oversrating Capacity	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly	150 %, shortly
Leakage current (50 Hz)	0 mA	0 mA	0 mA	0 mA	0 mA
Approvals					
Approvals	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8	cURus, UL 1283 5th edition, CSA C22.2 No.8
Environment					
Climatic category	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]	25/085/21 [in accordance with EN 60068-1]
Ambient temperature max.	50 °C	50 °C	50 °C	50 °C	50 °C
Safety and protection					
SCCR*	100 kA	100 kA	100 kA	100 kA	100 kA
Type	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure	Metal enclosure
Protection index	IP 20	IP 20	IP 20	IP 20	IP 20
Safety class (prepared)	I	I	I	I	I
Test voltage	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE	2150 Vdc Phase/Phase, 2700 Vdc Phase/PE
Notes					
*	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse	with corresponding preliminary fuse
Order numbers					
Order Number	HLD 810-500/75	HLD 810-500/100	HLD 810-500/130	HLD 810-500/180	HLD 810-500/250

1.1

1.2

1.3

2.1

2.2

3.1

3.2

3.3

4.0

5.1

5.2



Radio interference suppression filter, three-phase, for IT Network **HLD 810**



Typ	Terminals phase	Terminals PE	Fixing method	Fixing screws	Weight	Dimension picture (in mm)						
						A	B	C	D	E	F	
HLD 810-500/8	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	0.78 kg	1	190	45	75	20	180	166
HLD 810-500/12	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	1.00 kg	1	220	45	75	20	210	190
HLD 810-500/16	Screw clamp, 4 mm ²	Bolt, M5	Mounting lugs	M5	1.20 kg	1	250	45	75	20	240	220
HLD 810-500/30	Screw clamp, 10 mm ²	Bolt, M5	Mounting lugs	M5	1.80 kg	1	270	55	95	30	255	240
HLD 810-500/42	Screw clamp, 10 mm ²	Bolt, M6	Mounting lugs	M5	2.10 kg	1	310	55	95	30	295	280
HLD 810-500/55	Screw clamp, 16 mm ²	Bolt, M6	Mounting lugs	M5	2.50 kg	2	250	85	95	60	235	255
HLD 810-500/75	Screw clamp, 35 mm ²	Bolt, M8	Mounting lugs	M6	4.50 kg	2	270	85	135	60	255	310
HLD 810-500/100	Screw clamp, 50 mm ²	Bolt, M10	Mounting lugs	M6	5.20 kg	2	270	95	150	65	255	325
HLD 810-500/130	Screw clamp, 50 mm ²	Bolt, M10	Mounting lugs	M6	5.60 kg	2	270	95	150	65	255	325
HLD 810-500/180	Screw clamp, 95 mm ²	Bolt, M12	Mounting lugs	M6	9.20 kg	2	380	130	181	102	365	440
HLD 810-500/250	Screw clamp, 150 mm ²	Bolt, M12	Mounting lugs	M6	12.20 kg	2	450	155	220	125	435	525

Dimension pictures

